


Clamp-in Valves

These valves ship unassembled and can be bent to the desired configuration in accordance with tubeless valve dimension chart in section nine (9) of the Tire and Rim Book. Bent valves are made to order.




Due to the variety of operating conditions and applications, the customer is responsible to perform their own testing to ensure performance, safety and warranty requirements for the intended application.

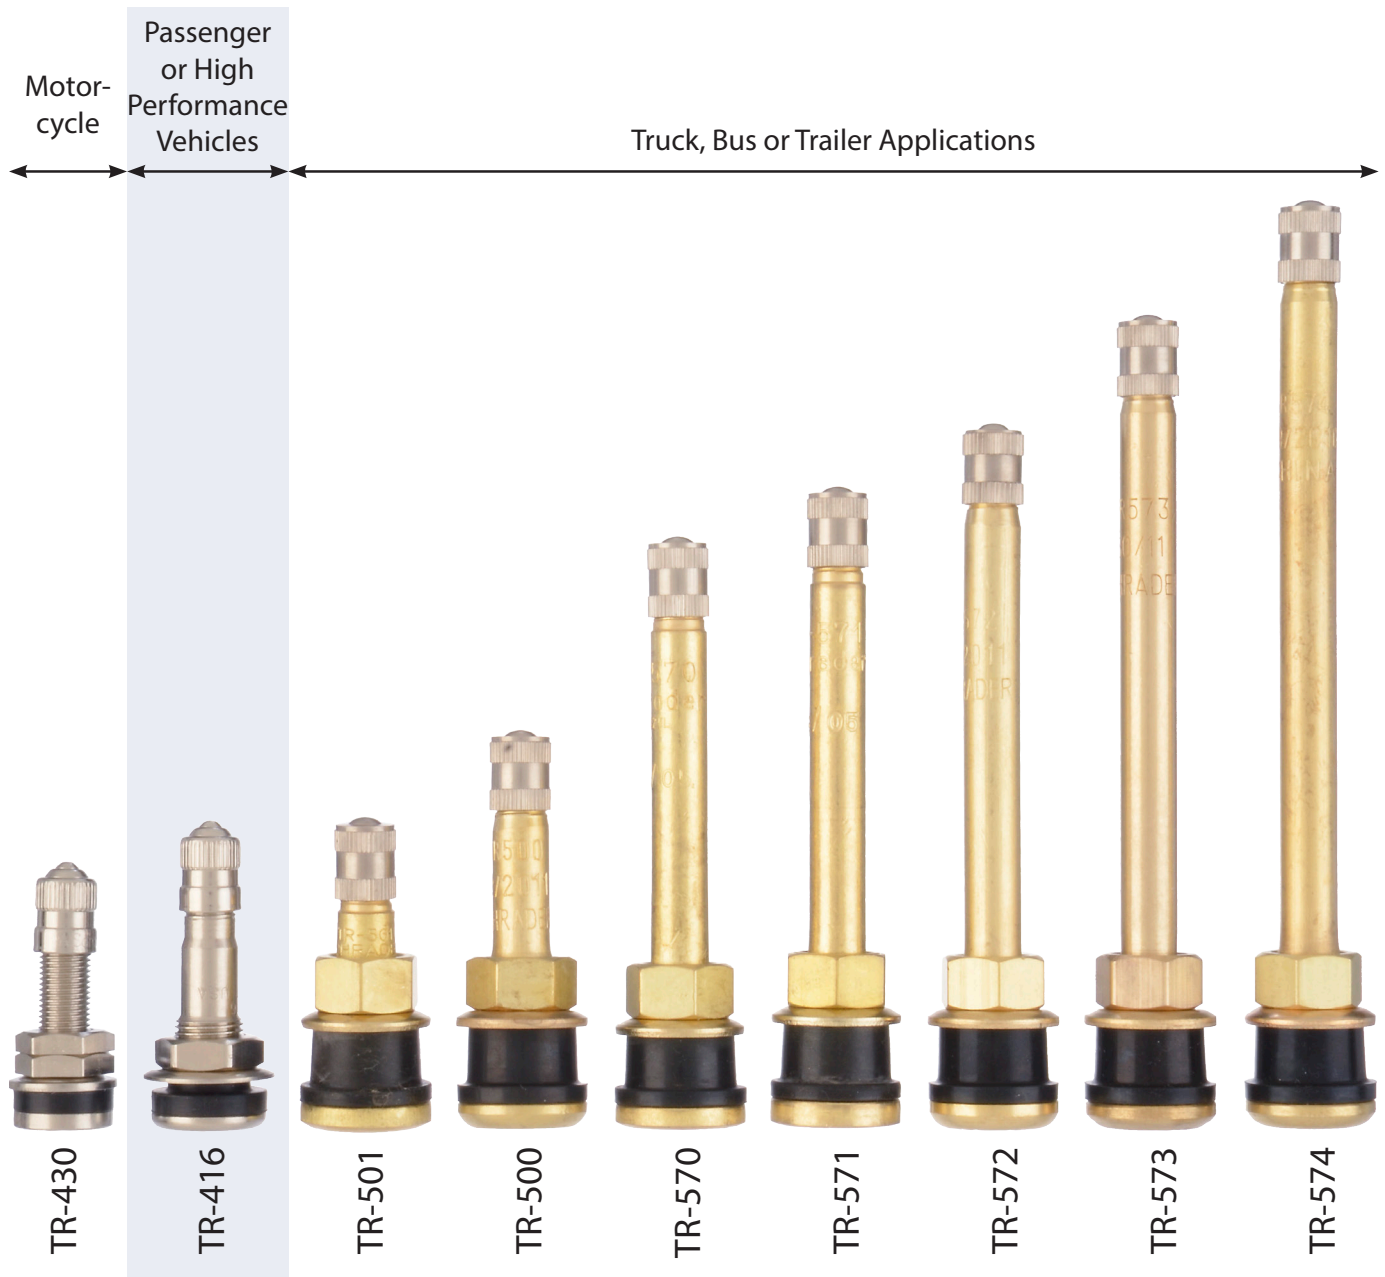

205 Frazier Road • Altavista, Virginia 24517 • 1.800.345.0578 • www.Schrader-Pacific.com

Clamp-in Valves

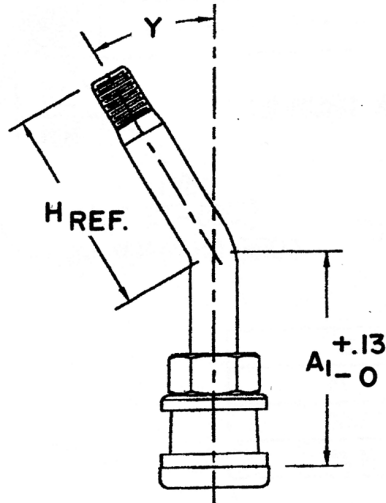

Tool Setting	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
Angle - Y	4°	11°	16°	21°	26°	31°	36°	41°	46°	51°	56°	61°	66°	71°	76°	81°	86°

TOOL SETTING TO PRODUCE LENGTHS A AND H

Tool Setting	Length H	LENGTHS A, + .13 -0				
		TR 570	TR 571	TR 572	TR 573	TR 574
12	1.50	1.63	1.88	2.25	2.88	3.50
13	1.63	1.50	1.75	2.13	2.75	3.38
14	1.75	1.38	1.63	2.00	2.63	3.25
15	1.88	1.25	1.50	1.88	2.50	3.13
16	2.00	1.13	1.38	1.75	2.38	3.00
17	2.13	1.00	1.25	1.63	2.25	2.88
18	2.25		1.13	1.50	2.13	2.75
19	2.38		1.00	1.38	2.00	2.63
20	2.50		*0.88	1.25	1.88	2.50
21	2.63			1.13	1.75	2.38
22	2.75			1.00	1.63	2.25
23	2.88			*0.88	1.50	2.13
24	3.00				1.38	2.00
25	3.13				1.25	1.88
26	3.25				1.13	1.75
27	3.38				1.00	1.63
28	3.50				*0.88	1.50
29	3.50					1.38
30	3.75					1.25
31	3.75					1.13
32	4.00					1.00

*At A = 0.88, the maximum bend angle is 26°

NOTE: Valve Designation:

TR Valve No. - Tool Setting

Example: TR 570-C12