


Clamp-in Tubeless Tire Valves


These valves ship un-assembled and can be bent to the desired configuration in accordance with tubeless tire valve dimension chart in section nine (9) of the Tire and Rim Book. Bent valves are made to order.



Due to the variety of operating conditions or applications, the customer is responsible to perform their own testing to insure performance, safety and warning requirements for the intended application.

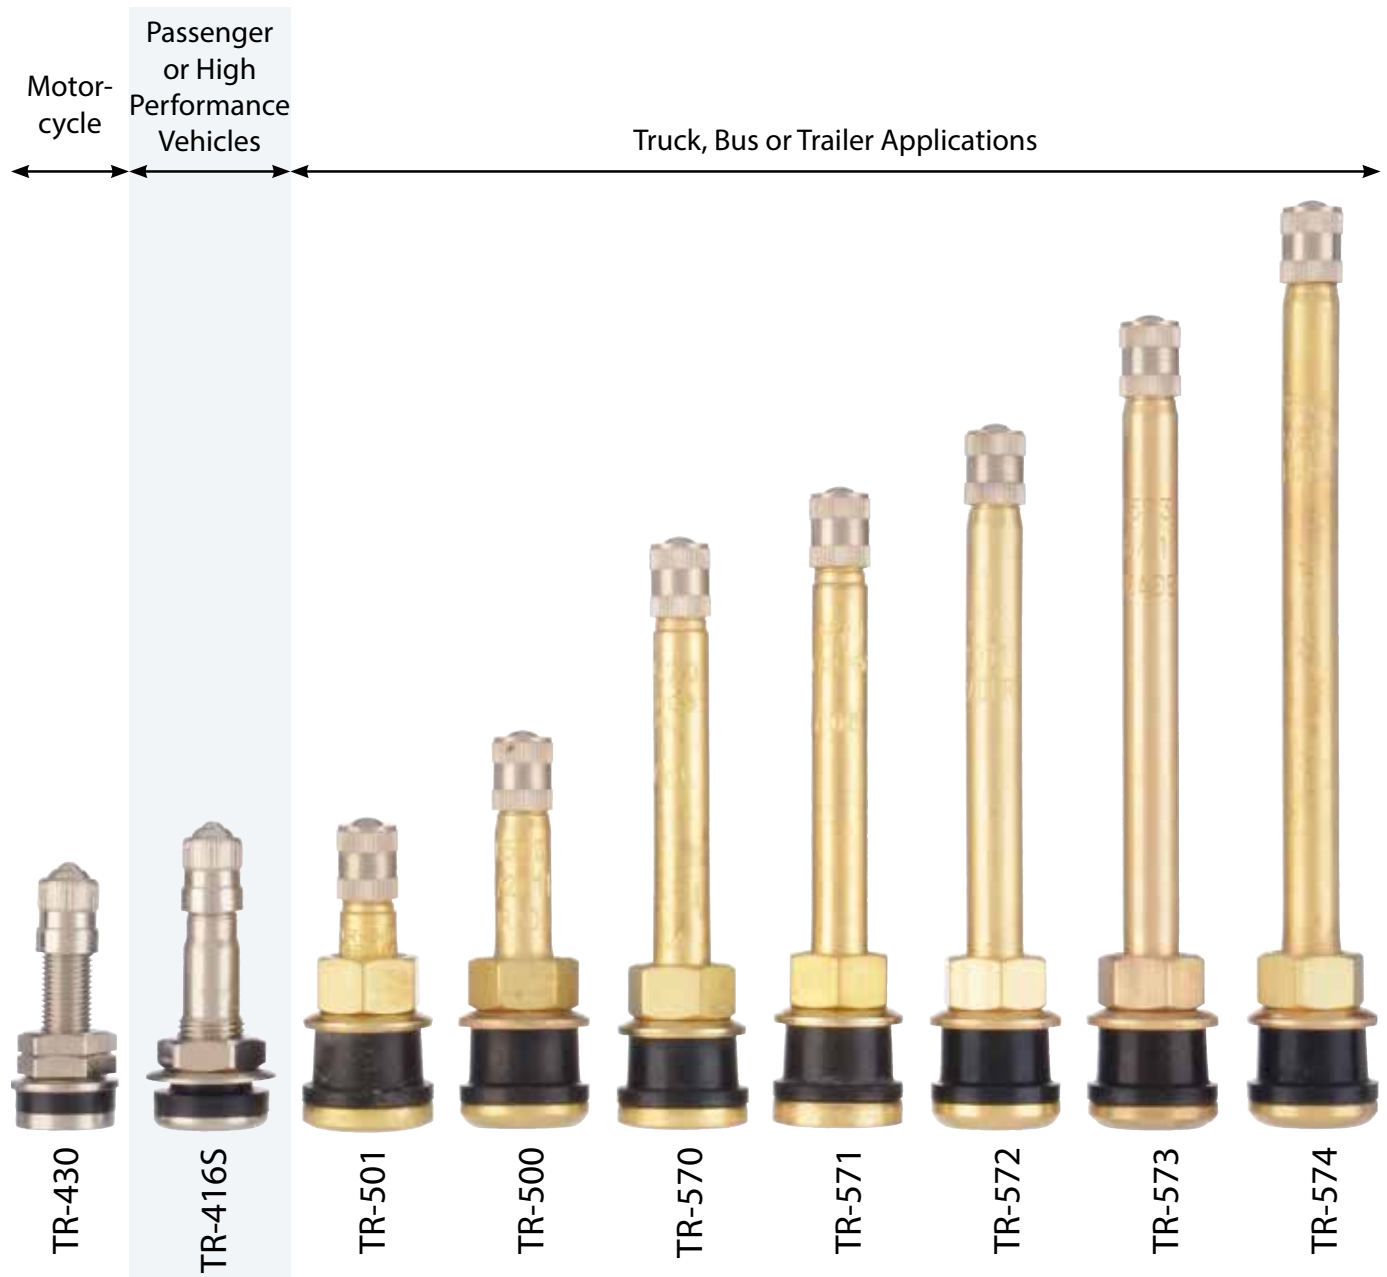

Clamp-in Tubeless Tire Valves

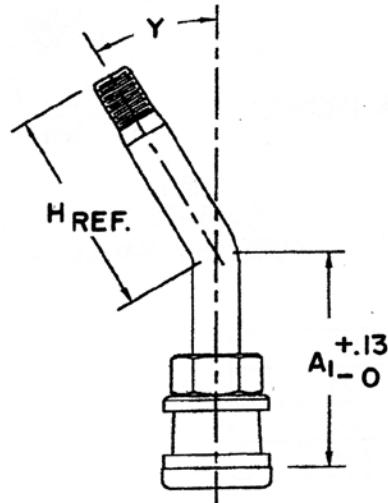

Tool Setting	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
Angle - Y	4°	11°	16°	21°	26°	31°	36°	41°	46°	51°	56°	61°	66°	71°	76°	81°	86°

TOOL SETTING TO PRODUCE LENGTHS A AND H

Tool Setting	Length H	LENGTHS A, + .13 -0				
		TR 570	TR 571	TR 572	TR 573	TR 574
12	1.50	1.63	1.88	2.25	2.88	3.50
13	1.63	1.50	1.75	2.13	2.75	3.38
14	1.75	1.38	1.63	2.00	2.63	3.25
15	1.88	1.25	1.50	1.88	2.50	3.13
16	2.00	1.13	1.38	1.75	2.38	3.00
17	2.13	1.00	1.25	1.63	2.25	2.88
18	2.25		1.13	1.50	2.13	2.75
19	2.38		1.00	1.38	2.00	2.63
20	2.50		*0.88	1.25	1.88	2.50
21	2.63			1.13	1.75	2.38
22	2.75			1.00	1.63	2.25
23	2.88			*0.88	1.50	2.13
24	3.00				1.38	2.00
25	3.13				1.25	1.88
26	3.25				1.13	1.75
27	3.38				1.00	1.63
28	3.50				*0.88	1.50
29	3.50					1.38
30	3.75					1.25
31	3.75					1.13
32	4.00					1.00

*At A, = 0.88, the maximum bend angle is 26°

NOTE: Valve Designation:

TR Valve No. - Tool Setting

Example: TR 570-C12

